


NOTES:

1. ALL THREADED FITTINGS MUST HAVE 3/4" TEFLON TAPE
2. PROVIDE QUICK COUPLER KEY PER SPECS.
3. USE TWO #4X36" REBAR FOR QCV FOR SPORTS FIELDS
4. PROVIDE 3" CLEARANCE BETWEEN VALVE & BOX
5. PROVIDE 2 EA. CONCRETE BRICKS UNDER VALVE BOX.
6. QUICK COUPLERS VALVES MUST BE 150' APART TYP.



LD Consulting 2012 (Any deviation or reproduction of this design must be approved in writing by Valley-Wide Recreation & Park District)

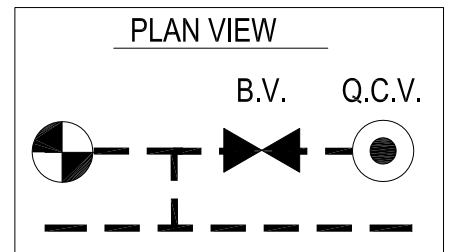

VALLEY-WIDE RECREATION & PARK DISTRICT

QUICK COUPLER VALVE

IR-03

REV. 2012